

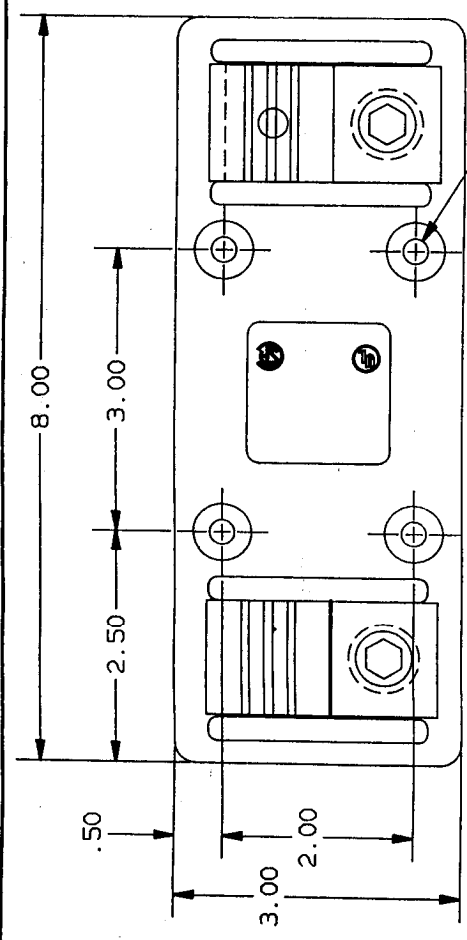


REV	DATE	ECO	DESCRIPTION	BY	CK
00	12/15/94		RELEASED	AD	

GOULD P/N 22001R	CONN BOX	RMS RATING 200K	SYM 200K	TORQUE (IN-LBS) 375	WIRE 6075AL/CU	UL I ZLT	CSA LR32169
------------------------	-------------	-----------------------	-------------	---------------------------	-------------------	-------------	----------------

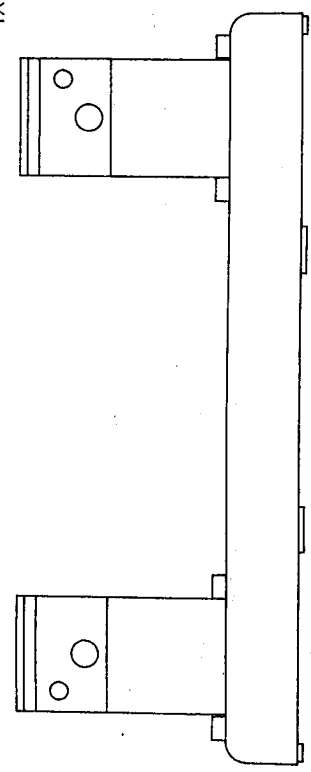

Ø .25 THRU  
Ø .62L .50V  
4X

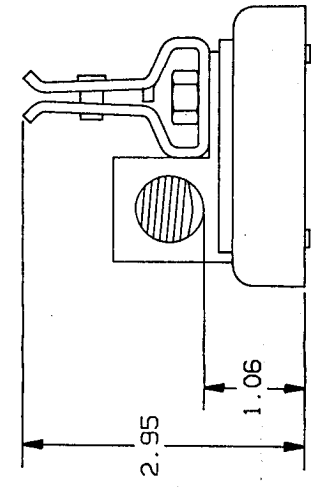

CONTROLLED COPY  
ISSUED TO Newburyport  
DATE JAN 30 1995

P/N 22001R

**GOULD** GOLD LINE  
CIRCUIT PROTECTION DIV.  
DRAWN BY: KDS DATE: 12/94  
CHECKED BY: DATE: SCALE: NONE  
TOLERANCE TO BE APPLIED UNLESS OTHERWISE SPECIFIED:  
FRACTIONS: XX/100, DECIMALS: .X00A-.005, .X0A-.01.  
UNSPECIFIED ANGLES SHALL BE SPECIFIED ANGLES 90°.  
ALL DIMENSIONS TO BE TO DIMENSIONS UNLESS OTHERWISE SPECIFIED.  
THIS DRAWING AND ALL INFORMATION THEREON IS THE PROPERTY OF GOULD INC. AND IS TO BE USED ONLY FOR THE PROJECT AND QUANTITY FOR WHICH IT WAS DRAWN. IT SHALL NOT BE MADE PUBLIC OR COPIED UNLESS AUTHORIZED.  
REF: DOC: IDENTIFICATION NO. & REVISION

FUSE BLOCK  
05B0505  
00

- 5. SPRING REINF. NOT SHOWN
  - 4. USES 5/16 HEX SOCKET WRENCH
  - 3. 250V/200A, 1 POLE, CLASS R
  - 2. TOLERANCE ±.015
  - 1. MATERIAL COMPOSITION AND RATING: BASE - PHENOLIC  
CONNECTOR - TIN PLATED ALUM  
CLIP - TIN PLATED COPPER ALLOY
- NOTES: UNLESS OTHERWISE SPECIFIED