
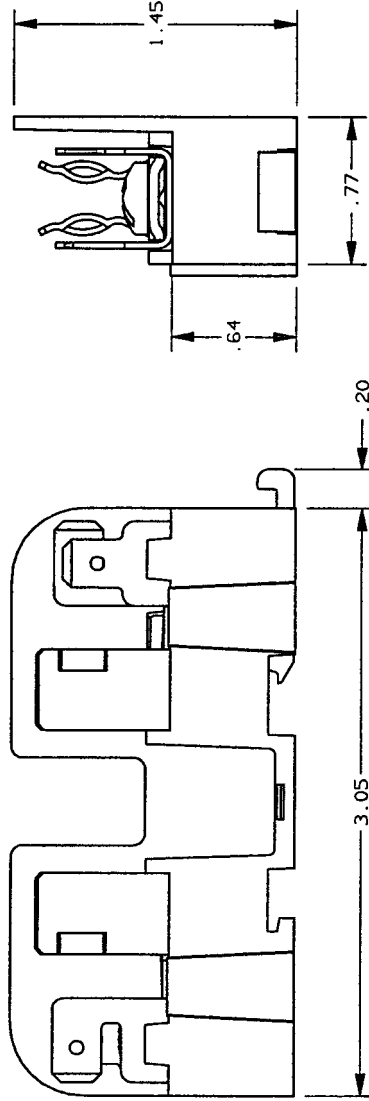


|     |         |     |                 |     |        |
|-----|---------|-----|-----------------|-----|--------|
| REV | DATE    | ECO | DESCRIPTION     | BY  | CK APP |
| -   | 4-15-99 | N/A | INITIAL RELEASE | LDB | N/A    |

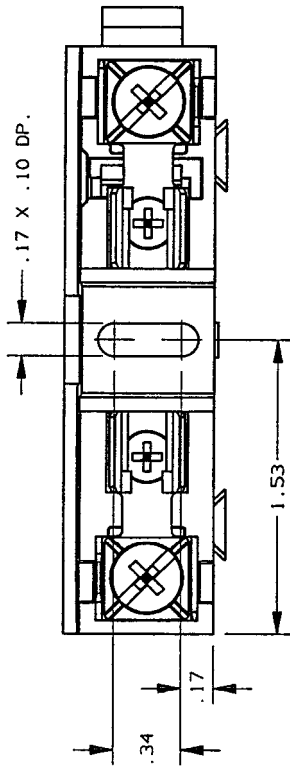

NOTES:

1. MATERIAL COMPOSITION AND RATING:  
BASE - THERMOPLASTIC 125°C RTI
2. ALL TOLERANCES ±.010 UNLESS OTHERWISE NOTED

| P/N    | CONN TYPE | RMS SYM RATING | TORQUE (IN-LBS) | WIRE °C | TYPE    | U/L    | CSA     |
|--------|-----------|----------------|-----------------|---------|---------|--------|---------|
| 40120G | PRESSURE  | 100K           | 20              | 60/75   | CU ONLY | E52283 | LR32169 |
|        |           |                |                 |         |         | IZLT   |         |

**GOULD** 374 MERRIMAC STREET  
NEWBURYPORT, MA 01950

DESIGN ENGINEER  
SIGN: *Elizabeth J. ...*  
DATE: 5/10/99

PRODUCT MANAGER  
SIGN: *Nickel ...*  
DATE: 5-10-99

OUTLINE DIMENSIONS  
NOT TO BE USED FOR PRODUCTION

FUSE BLOCK, 600V-15A, ADDER  
CLASS G

700448