
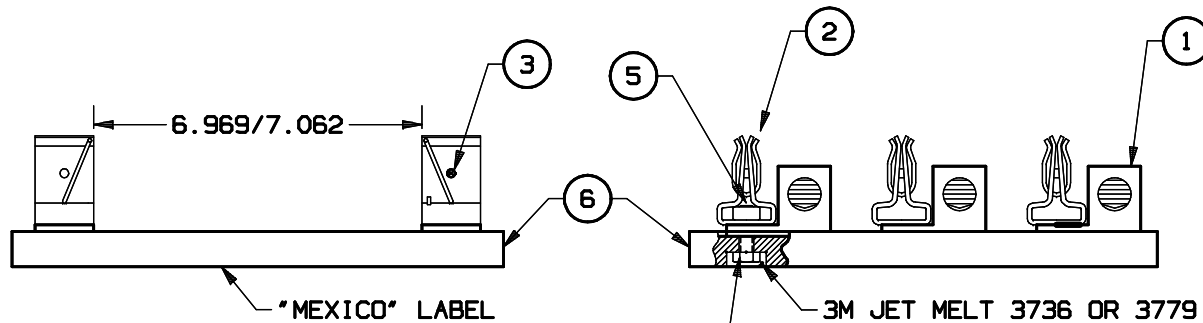


REV	DATE	ECD	DESCRIPTION	BY	CK
00	4/11/95		RELEASED		

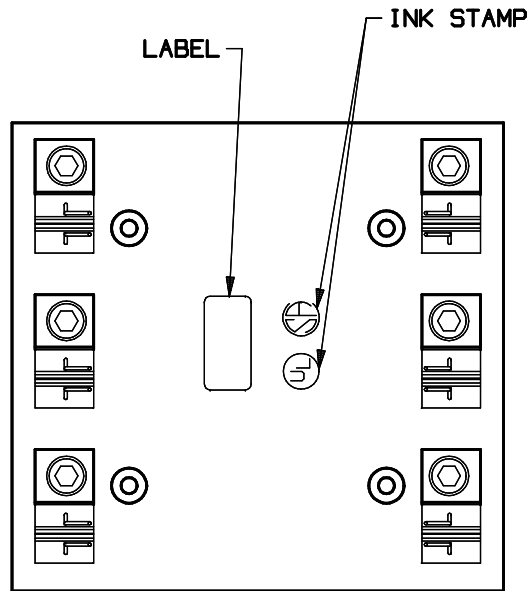

P/N 62003R
62053R

NOTE
1. MUST WITHSTAND FOR 1 SECOND, WITHOUT BREAKDOWN, THE APPLICATION OF 2640V AC BETWEEN LIVE PARTS AND EXPOSED NON-CURRENT-CARRYING-METAL PARTS.

4 TORQUE
200 IN-LBS.

	GOULD INC. P.O. BOX 729 HARLE FALLS, TX 78654		TOLERANCE TO BE APPLIED UNLESS OTHERWISE SPECIFIED: .XXXXX.0005; . .XXXX.005; . .XX4.01; . .X4.05; . .XX41/2; UNSPECIFIED ANGLES 45°; . . SPECIFIED ANGLES 40°/30° DIMENSIONS APPLY AFTER PLATING ALL SURFACES TO BE 125 UNLESS OTHERWISE SPECIFIED BREAK ALL SHARP EDGES THIS DRAWING AND ALL INFORMATION THEREON IS THE PROPERTY OF GOULD INC. AND IS SUBJECT TO RETURN ON DEMAND. THIS INFORMATION IS CONFIDENTIAL AND MUST NOT BE MADE PUBLIC OR COPIED UNLESS AUTHORIZED.
	CIRCUIT PROTECTION DIV. DRAWN BY: CEP	DATE: 3/95	
CHECKED BY:	DATE:	SCALE: NONE	REFDOC:
DESCRIPTION ASSEMBLY, 600V-200A, 3 POLE	IDENTIFICATION NO. & REVISION 31B0479		00