

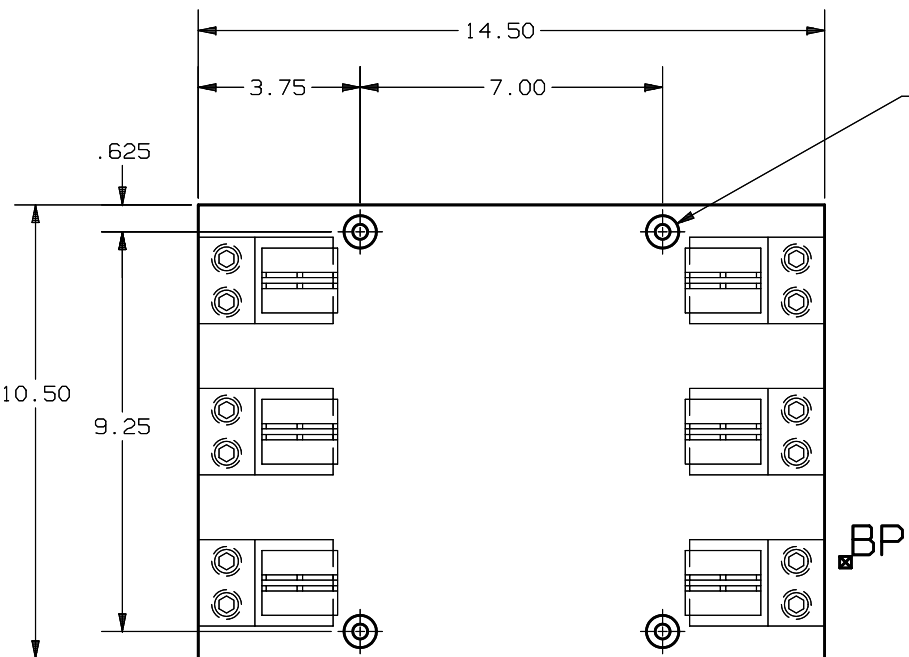


REV - LINES
REV - LINES
REV - LINES
REV - LINES
REV - LINES
REV - LINES
REV - LINES
REV - LINES
REV - LINES
REV - LINES

OO 1/20/95 RELEASED

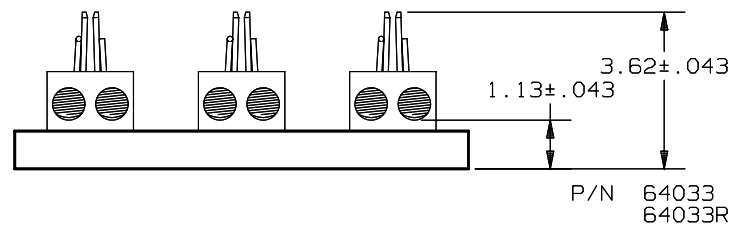

GOULD P/N	CONN TYPE	RMS SYM RATING	TORQUE (IN-LBS)	UL		CSA
				FILE NO.	GUIDE NO.	REPORT NO.
64033	BOX	10K	275	E52283	IZLT	LR32169
64033R		200K				

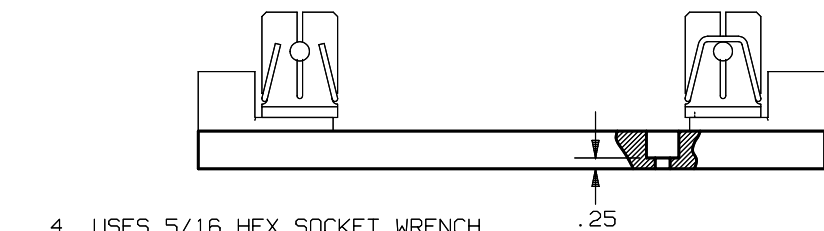

- 4. USES 5/16 HEX SOCKET WRENCH
 - 3 CLASS R FUSES ONLY
 - 2. 600V-400A, 3 POLE, AL-CU WIRE, CLASS H K AND R
 - 1. MATERIALS: BASE - PHENOLIC
CONDUCTORS- TIN PLATED COPPER ALLOY OR ALUMINUM
- NOTES: UNLESS OTHERWISE SPECIFIED

KDS 12/94