

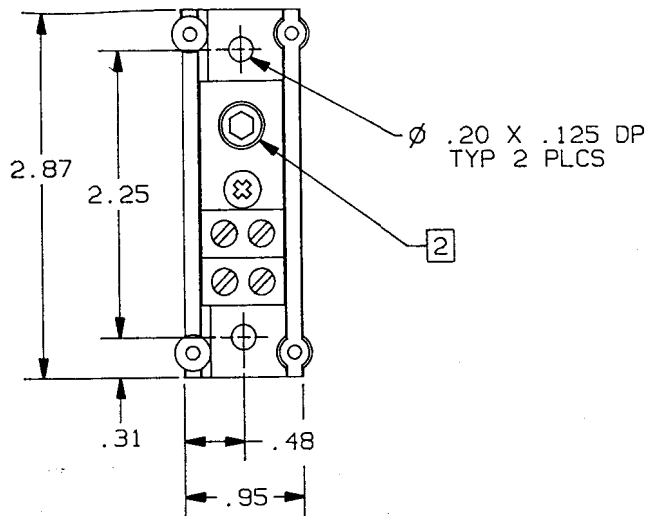


REV	DATE	ECO	DESCRIPTION	BY	CK
00	4/28/92	92-050	RELEASED	101	60



P/N	WIRE RANGE & TORQUE (IN-LBS)				U L		CSA		
	PRIMARY		SECONDARY		FILE NO.	GUIDE NO.	REPORT NO.		
	RANGE	TORQUE	RANGE	TORQUE					
62131	2/0-#14	2/0-#3	50	#4-#14	#4-#6	E73571	XCFR2	LR69363	
		#4-#6	45		#8				25
		#8	40		#10-#14				20
		#10-#14	35						
63131	2/0-#14	2/0-#6	120	#4-#14	#4-#6	E73571	XCFR2	LR69363	
		#8-#14	50		#8				25
					#10-#14				20

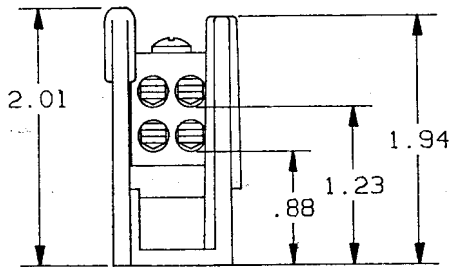

REFERENCE

APR 28 1992

P/N 62131 (CU-ONLY)
P/N 63131 (CU-AL)

- 3. (1)2/0-#14 X (4)#4-14 1 POLE 600V
- 2 P/N 62131 USES SLOTTED SET SCREW
P/N 63131 USES HEX SET SCREW
- 1. MATL COMPOSITION AND RATING:
BASE-THERMOPLASTIC-125°C RTI
CONNECTOR-ALUMINUM OR COPPER
ALLOY-TIN PLATED.
NOTES: UNLESS OTHERWISE SPECIFIED

GOULD GOLD INC. <small>P.O. BOX 728 MABLE FALLS, TX 78654</small>		<small>TOLENANCE TO BE APPLIED UNLESS OTHERWISE SPECIFIED: .0004, .0005, .0004, .0005, .004, .011, .04, .02, 1/32, 1/16, 1/8</small> <small>UNSPECIFIED ANGLES: 45°, SPECIFIED ANGLES: 30°</small> <small>DIMENSIONS APPLY AFTER PLATING</small> <small>ALL SURFACES TO BE 125 UNLESS OTHERWISE SPECIFIED</small> <small>BREAK ALL SHARP EDGES</small> <small>THIS DRAWING AND ALL INFORMATION THERE ON IS THE PROPERTY OF GOULD INC. AND IS SUBJECT TO RETURN ON DEMAND. THIS INFORMATION IS CONFIDENTIAL AND MUST NOT BE MADE PUBLIC OR COPIED UNLESS AUTHORIZED.</small> <small>REFDOC: -</small>	
<small>DRWN BY:</small> KDS	<small>DATE:</small> 4/92	<small>DIV. REL.</small>	
<small>CHECKED BY:</small> GO	<small>DATE:</small>	<small>SCALE:</small> NONE	
<small>DESCRIPTION:</small> PDB		<small>IDENTIFICATION NO. & REVISION</small> 05B0389	