

REV	DATE	EDD	DESCRIPTION	BY	CK
00	5/92		RELEASED	PM	CO



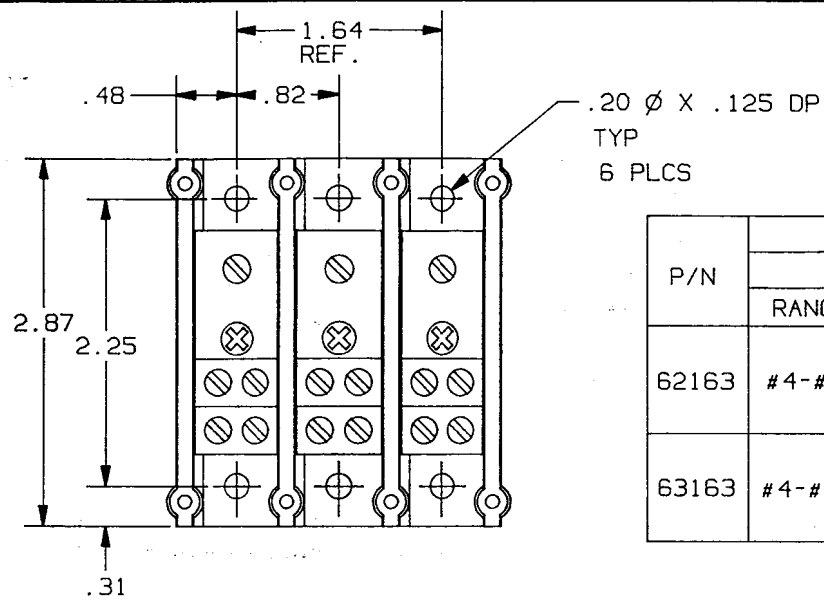


TABLE I

P/N	WIRE RANGE & TORQUE (IN-LBS)				UL		CSA		
	PRIMARY		SECONDARY		FILE NO.	GUIDE NO.	REPORT NO.		
	RANGE	TORQUE	RANGE	TORQUE					
62163	#4-#14	#4-#6	35	#4-#14	#4-#6	E73571	XCFR2	LR69363	
		#8	25		#8				25
		#10-#14	20		#10-#14				20
63163	#4-#14	#4-#6	35	#4-#14	#4-#6	E73571	XCFR2	LR69363	
		#8	25		#8				25
		#10-#14	20		#10-#14				20

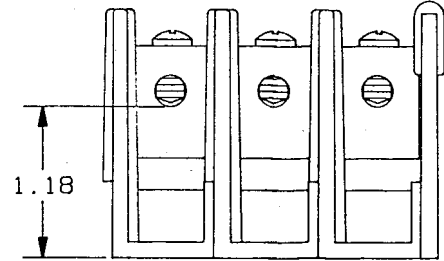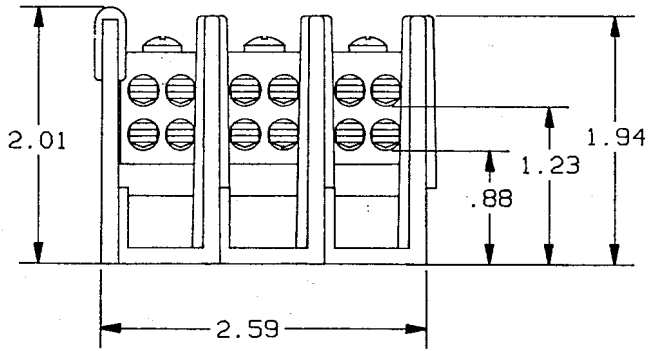

REFERENCE  
MAY 21 1992

P/N 62163 (CU ONLY)  
P/N 63163 (CU-AL)

- (1)#4-#14 X (4)#4-#14 3 POLE 600V
- MATL COMPOSITION AND RATING:  
BASE-THERMOPLASTIC-125°C RTI  
CONNECTOR-ALUMINUM OR COPPER ALLOY-TIN PLATED.

NOTES: UNLESS OTHERWISE SPECIFIED

<b>GOULD</b> WOOD INC. P.O. BOX 728 FARLE FALLS, TX 78654 CIRCUIT PROTECTION DIV.		TOLERANCE TO BE APPLIED UNLESS OTHERWISE SPECIFIED: .XXX0-.0005, .XXX0-.001, .XXX0-.011, .XX-.021 1/AA1/32 UNSPECIFIED ANGLES 90°, SPECIFIED ANGLES 40°/30° OTHERS APPLY AFTER PLATING ALL SURFACES TO BE 125° UNLESS OTHERWISE SPECIFIED BREAK ALL SHARP EDGES THIS DRAWING AND ALL INFORMATION THEREON IS THE PROPERTY OF WOOD INC. AND IS SUBJECT TO RETURN ON DEMAND. THIS INFORMATION IS CONFIDENTIAL AND MUST NOT BE MADE PUBLIC OR COPIED UNLESS AUTHORIZED. REFDOC:	
DRAWN BY: KDS	DATE: 4/92	DVT. REL. 92-056	
CHECKED BY: GO	DATE:	SCALE: NONE	
DESCRIPTION PDB		IDENTIFICATION NO. & REVISION 05B0306	