

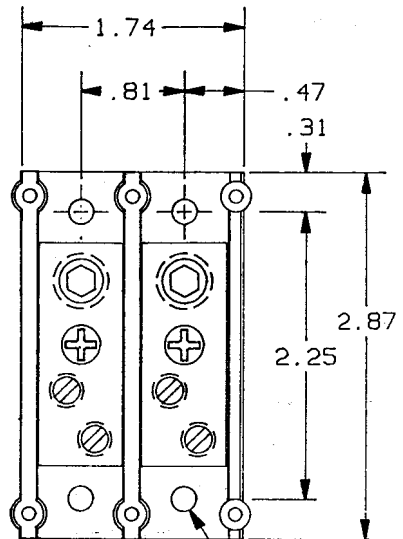


REV	DATE	ECO	DESCRIPTION	BY	CK
00	6/92		RELEASED	BJ	GO

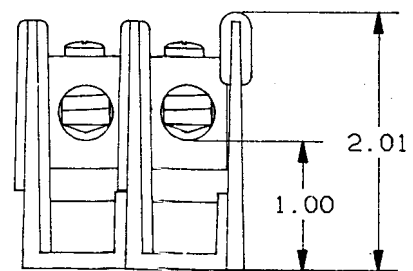

Ø .20 X .13 DP.
TYP. 4X

P/N	WIRE RANGE & TORQUE (IN-LBS)				UL		CSA
	PRIMARY		SECONDARY		FILE NO.	GUIDE NO.	REPORT NO.
	RANGE	TORQUE	RANGE	TORQUE			
63192	2/0-#14	2/0-#6 120 #8-#14 50	#2-#14	#2-#3 50 #4-#6 35 #8 25 #10-#14 20	E73571	XCFR2	LR69363

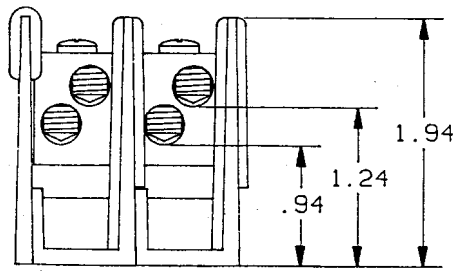

REFERENCE
JUL 14 1992

P/N 63192

- NOTES:
1. MATL COMPOSITION AND RATING: BASE-THERMOPLASTIC 125°C RTI
CONNECTOR- ALUMINUM TIN PLATED
 2. (1) 2/0-#14 X (2) #2-#14 2 POLE 600V CU-AL

		<small>GOULD INC. P.O. BOX 728 WIMBLEDON, TX 79854</small>		<small>TOLERANCE TO BE APPLIED UNLESS OTHERWISE SPECIFIED: .0005A-.0005I, .0005A-.0005I, .00A-.01I, .0A-.02I, X/XA1/2E UNSPECIFIED ANGLES 45°, SPECIFIED ANGLES 40°/30° DIMENSIONS APPLY AFTER PLATING ALL SURFACES TO BE 125° UNLESS OTHERWISE SPECIFIED BREAK ALL SHARP EDGES THIS DRAWING AND ALL INFORMATION THEREON IS THE PROPERTY OF GOULD INC. AND IS SUBJECT TO RETURN ON DEMAND. THIS INFORMATION IS CONFIDENTIAL AND MUST NOT BE MADE PUBLIC OR COPIED UNLESS AUTHORIZED.</small>	
<small>DRAWN BY:</small> KDS	<small>DATE:</small> 6/92	<small>DRY. REL.</small> G2-079	<small>REFDOC:</small>		
<small>CHECKED BY:</small>	<small>DATE:</small>	<small>SCALE:</small> NONE	<small>IDENTIFICATION NO. & REVISION</small> POB 05B0398		