



REV	DATE	ECO	DESCRIPTION	BY	CK
00	7/6/95		RELEASED	20	

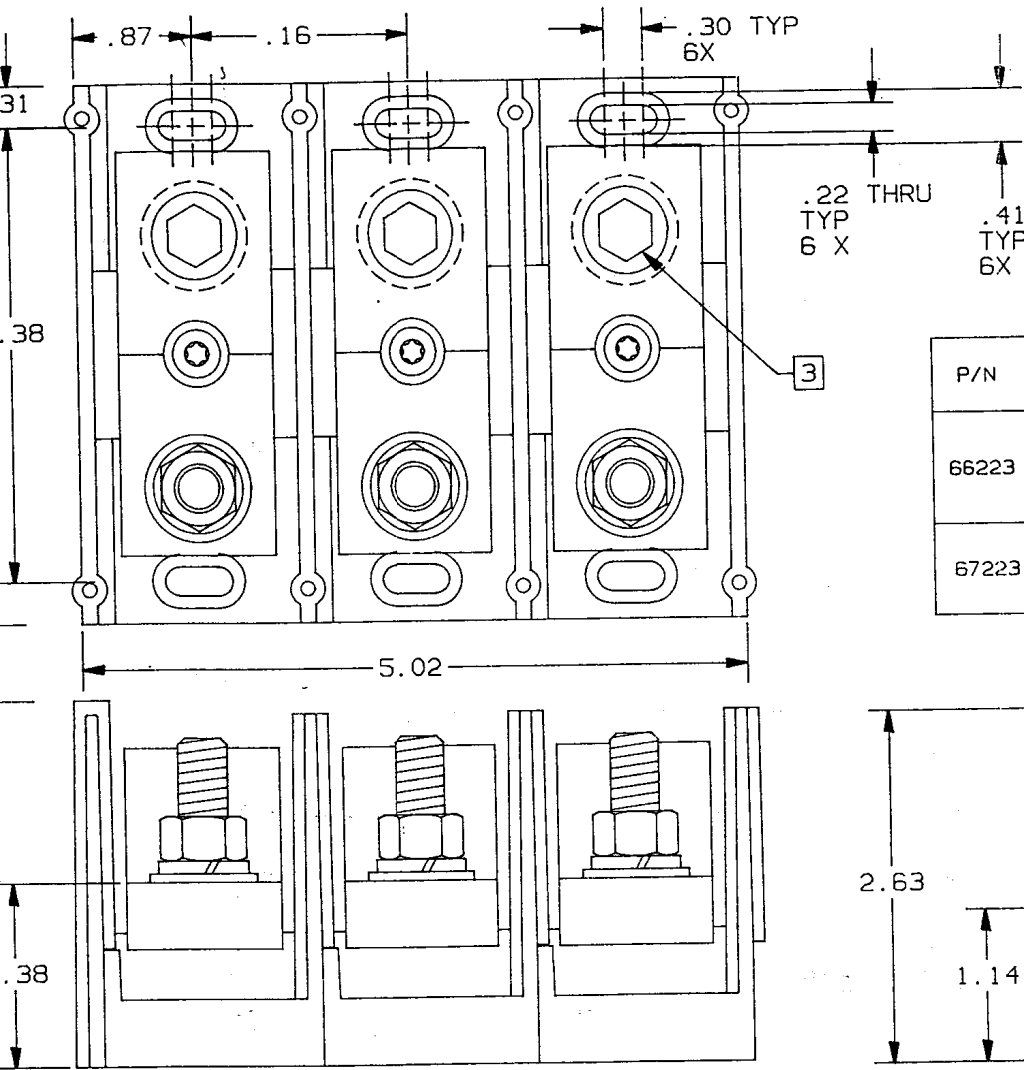

CONTROLLED COPY  
 ISSUED TO **Newburyport**  
 DATE JUL 12 1995

P/N	WIRE RANGE & TORQUE (IN-LBS)					UL		CSA
	PRIMARY		SECONDARY			FILE #	GUIDE #	REPORT #
	RANGE	TORQUE	RANGE	TORQUE				
66223	500MCM-#4	500MCM-#4	375	3/8 STUD	228	E73571	XCFR2	LR15469
67223	500MCM-#4	500MCM-#4	500	3/8 STUD	228	E73571	XCFR2	LR15469

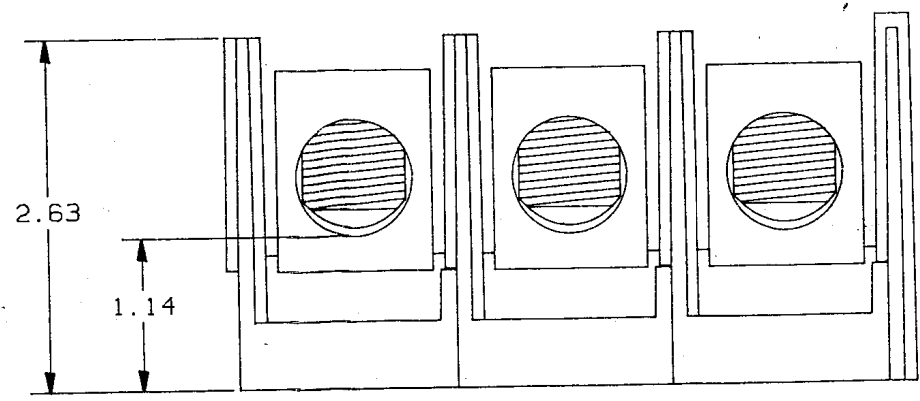

- 3 P/N 66223 USES 3/8 HEX DRIVER  
 P/N 67223 USES 7/16 HEX DRIVER
2. (1) 500MCM - #4 X (1) 3/8 STUD, 600V..3 POLE
1. MATERIAL COMPOSITION AND RATING:  
 BASE: THERMOPLASTIC 125°C RTI  
 CONNECTOR: ALUMINUM OR COPPER ALLOY-TIN PLATED
- NOTES: UNLESS OTHERWISE SPECIFIED

P/N 66223 (CU ONLY)  
 67223 (CU-AL)

		<small>GOULD INC.        P.O. BOX 788        WHEELER FALLS, TX 78854</small>		<small>TOLERANCE TO BE APPLIED UNLESS OTHERWISE SPECIFIED: .0004, .0005, .004, .005, .004, .011, .04, .02, 1/2X1/32        UNSPECIFIED ANGLES: 45°        DIMENSIONS APPLY AFTER PLATING        ALL SURFACES TO BE 125° UNLESS OTHERWISE SPECIFIED</small>	
DRAWN BY: <b>KDS</b>	DATE: <b>7/95</b>	INT. REL.	<small>BREAK ALL SHARP EDGES          THIS DRAWING AND ALL INFORMATION THEREON IS THE PROPERTY OF GOULD INC. AND IS SUBJECT TO RETURN ON DEMAND. THIS INFORMATION IS CONFIDENTIAL AND MUST NOT BE MADE PUBLIC OR COPIED UNLESS AUTHORIZED.</small>		
CHECKED BY:	DATE:	SCALE: NONE	REFDOC:	IDENTIFICATION NO. & REVISION <b>05B0518</b>	<b>00</b>
DESCRIPTION: <b>PDB</b>					