

REV	DESCRIPTION	DATE	APPD
00	RELEASED	11/91	<i>BM</i>



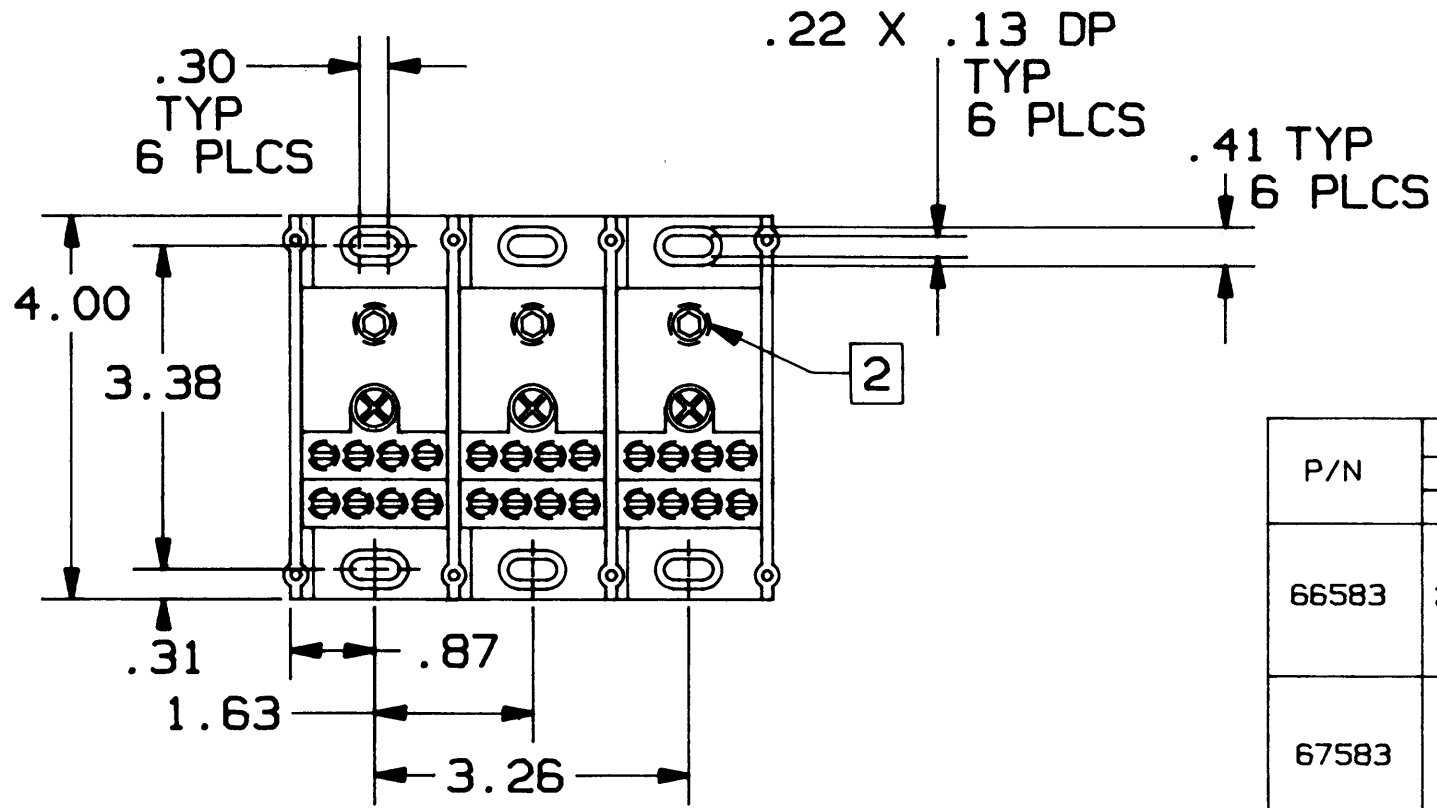


TABLE I

P/N	WIRE RANGE & TORQUE (IN-LBS)				U/L		CSA		
	PRIMARY		SECONDARY		FILE NO.	GUIDE NO.	REPORT NO.		
	RANGE	TORQUE	RANGE	TORQUE					
66583	2/0-#14	2/0-#3	50	#2-#14	#2-#3	E73571	XCFR2	LR69363	
		#4-#6	45		#4-#6				35
		#8	40		#8				25
		#10-#14	35		#10-#14				20
67583	2/0-#14	2/0-#6	120	#2-#14	#2-#3	E73571	XCFR2	LR15469	
		#8-#14	50		#4-#6				35
					#8				25
					#10-#14				20

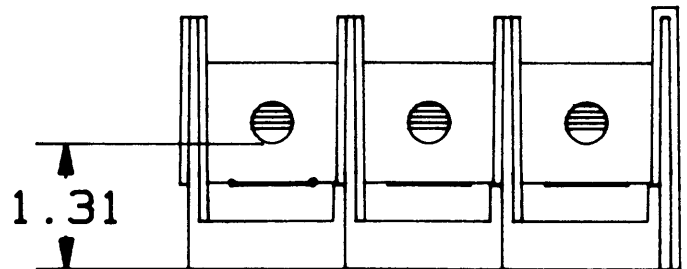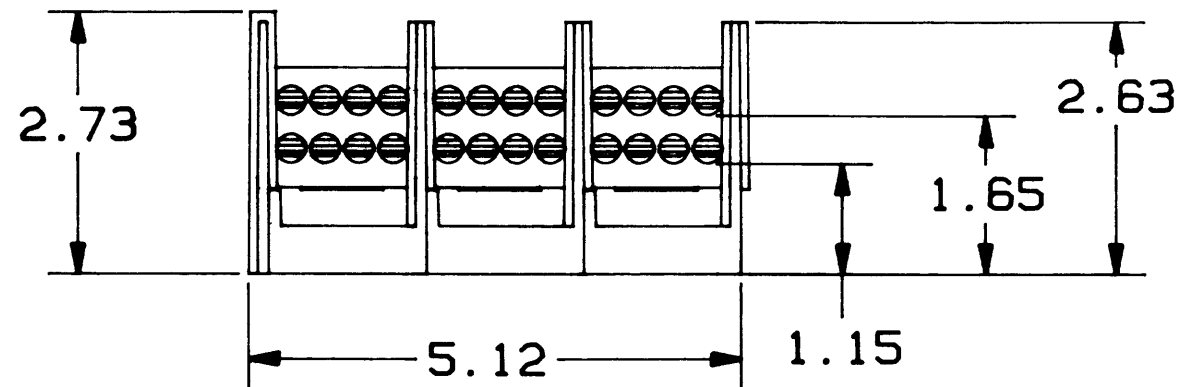

P/N 66583 (CU ONLY)
P/N 67583 (CU-AL)

2 P/N 66583 USES SLOTTED SET SCREW
P/N 67583 USES HEX SET SCREW.

1. MATL COMPOSITION AND RATING:
BASE-THERMOPLASTIC-125°C RTI
CONNECTOR-ALUMINUM OR COPPER
ALLOY-TIN PLATED.

NOTES: UNLESS OTHERWISE SPECIFIED

NOTES UNLESS OTHERWISE SPECIFIED - ALL DIMENSIONS ARE IN INCHES - STAMP OR ETCH DWG. NO. ON PART - REMOVE ALL BURRS AND SHARP EDGES - TOLERANCES: XXXX±.0005; XXX±.005; XX±.01; X±.04; X/X±1/32; ANGLES ±0°30'		MATERIAL		 GOULD SHAWMUT P.O. BOX 729 MARBLE FALLS, TX 78654	
		SEE NOTE 1			
THIS DRAWING AND ALL INFORMATION THEREON IS THE PROPERTY OF GOULD. IS CONFIDENTIAL. MUST NOT BE COPIED OR MADE PUBLIC UNLESS AUTHORIZED AND IS SUBJECT TO RETURN ON DEMAND.		N/A		PRODUCT INFO	
		SIGNATURES		DATE	
		DRWN	RW	11/91	
		CHKD	GO	11/91	
APPD		BM		11/91	
TITLE		DWG NO		REV	
PDB, (1) 2/0-#14 X (8) #2-#14 3 POLE 600V		0580363		00	
SCALE		FILE NO		SHEET	
NONE				1 of 1	