

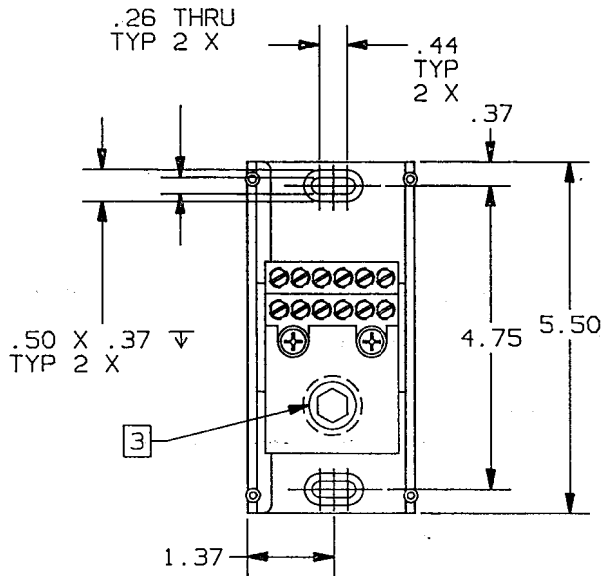


REV	DATE	ECO	DESCRIPTION	BY	CK
00	9/13/94		RELEASED	GO	

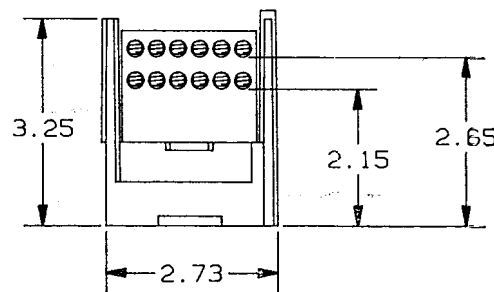

P/N	WIRE RANGE & TORQUE (IN-LBS)					UL		CSA
	PRIMARY		SECONDARY			FILE #	GUIDE #	REPORT #
	RANGE	TORQUE	RANGE	TORQUE				
68041	1000-250 MCM	1000-250 500	#4-#14	#4-#6	45	E73571	XCFR2	LR69363
				#8	40			
				#10-#14	35			
69041	1000-250 MCM	1000-250 780	#4-#14	#4-#8	40	E73571	XCFR2	LR15469
				#10-#14	35			

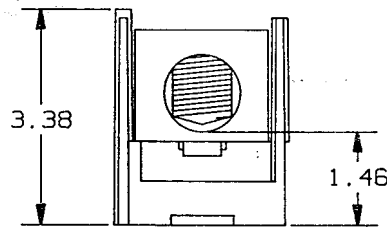

CONTROLLED COPY  
 DATE: SEP 15 1994  
*Newburyport*

4. TOLERANCE  $\pm .031$
- 3 68041 USES 3/8 HEX SOCKET WRENCH  
 69041 USES 9/16 HEX SOCKET WRENCH
2. (1) 1000-250 MCM X (12) #4-#14  
 1 POLE, 600V.
1. MATERIAL COMPOSITION AND RATING:  
 BASE - THERMOPLASTIC 125°C RTI  
 CONNECTOR - ALUMINUM OR COPPER ALLOY  
 W/TIN PLATE.

NOTES: UNLESS OTHERWISE SPECIFIED

P/N 68041 (CU ONLY)  
 P/N 69041 (AL-CU)

	GOULD INC. P.O. BOX 728 WHEEL FALLS, TX 78654	TOLERANCE TO BE APPLIED UNLESS OTHERWISE SPECIFIED: .X000A.0005I, .X000A.005I, .X00A.01I, .X0.05I, .X.041/25 UNSPECIFIED ANGLES 1". SPECIFIED ANGLES 30° DIMENSIONS APPLY AFTER PLATING ALL SURFACES TO BE 125 UNLESS OTHERWISE SPECIFIED	
	CIRCUIT PROTECTION DIV. DRAWN BY: KDS DATE: 9/94	INT. REL. NONE	BREAK ALL SHARP EDGES THIS DRAWING AND ALL INFORMATION THEREON IS THE PROPERTY OF GOULD INC. AND IS SUBJECT TO RETURN ON DEMAND. THIS INFORMATION IS CONFIDENTIAL AND MUST NOT BE MADE PUBLIC OR COPIED UNLESS AUTHORIZED.
CHECKED BY: PDB DATE:	SCALE: NONE	REFDOC:	IDENTIFICATION NO. & REVISION 05B0494 00