
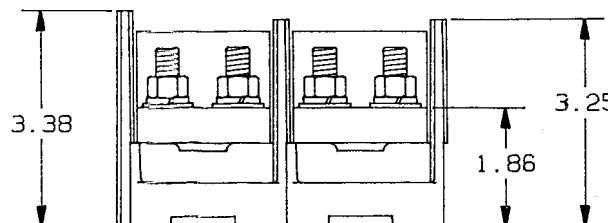


REV	DATE	ECC	DESCRIPTION	BY	CK
00	6/10/95		RELEASED		

P/N	WIRE RANGE & TORQUE (IN-LBS)				UL		CSA
	PRIMARY RANGE	TORQUE	SECONDARY RANGE	TORQUE	FILE #	GUIDE #	REPORT #
68242	250-1000	500	3/8 STUD	228	E73571	XCFR2	LR15469
69242	250-1000	780	3/8 STUD	228	E73571	XCFR2	LR15469

CONTROLLED COPY  
 ISSUED TO Newburyport  
 DATE JUN 20 1995

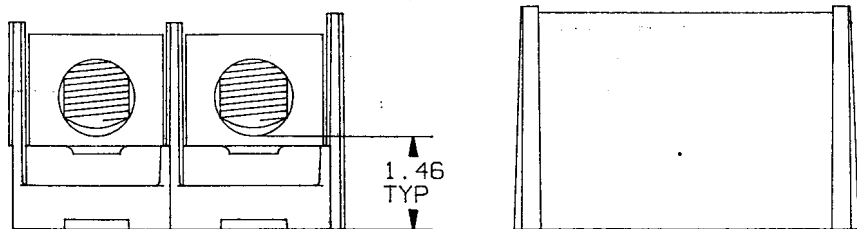

- 3 P/N 68242 USES A 3/8 HEX DRIVER  
 P/N 69242 USES A 9/16 HEX DRIVER
2. (1) 250 MCM - 1000 MCM X (2) 3/8 STUD  
 2 POLE, 600 VOLTS

1. MATERIAL COMPOSITION AND RATING:  
 BASE - THERMOPLASTIC 125°C RTI  
 CONNECTOR - ALUMINUM OR COPPER  
 ALLOY, TIN PLATED

NOTES: UNLESS OTHERWISE SPECIFIED

P/N 68242 (CU ONLY)  
 69242 (CU-AL)

<b>GOULD</b> GOULD INC. P.O. BOX 728 FARMER FALLS, TX 76844 CIRCUIT PROTECTION DIV.		TOLERANCE TO BE APPLIED UNLESS OTHERWISE SPECIFIED: .0004, .0005, .0004, .005, .004, .01, .04, .02, 1/32, 1/16, 1/8 UNLESS OTHERWISE SPECIFIED, SPECIFIED ANGLES 45° & 90° DIMENSIONS APPLY AFTER PLATING ALL SURFACES TO BE 125° UNLESS OTHERWISE SPECIFIED BREAK ALL SHARP EDGES THIS DRAWING AND ALL INFORMATION THEREON IS THE PROPERTY OF GOULD INC. AND IS SUBJECT TO RETURN ON DEMAND. THIS INFORMATION IS CONFIDENTIAL AND MUST NOT BE MADE PUBLIC OR COPIED UNLESS AUTHORIZED.	
DRAWN BY: KDS CHECKED BY:	DATE: 6/95 DATE:	DIM. REL.	SCALE: NONE
DESCRIPTION: PDB		REFCOD: IDENTIFICATION NO. & REVISION: 0580516 00	