REV	DATE	ECO	DESCRIPTION	BY	CK
00	4/93		RELEASED		

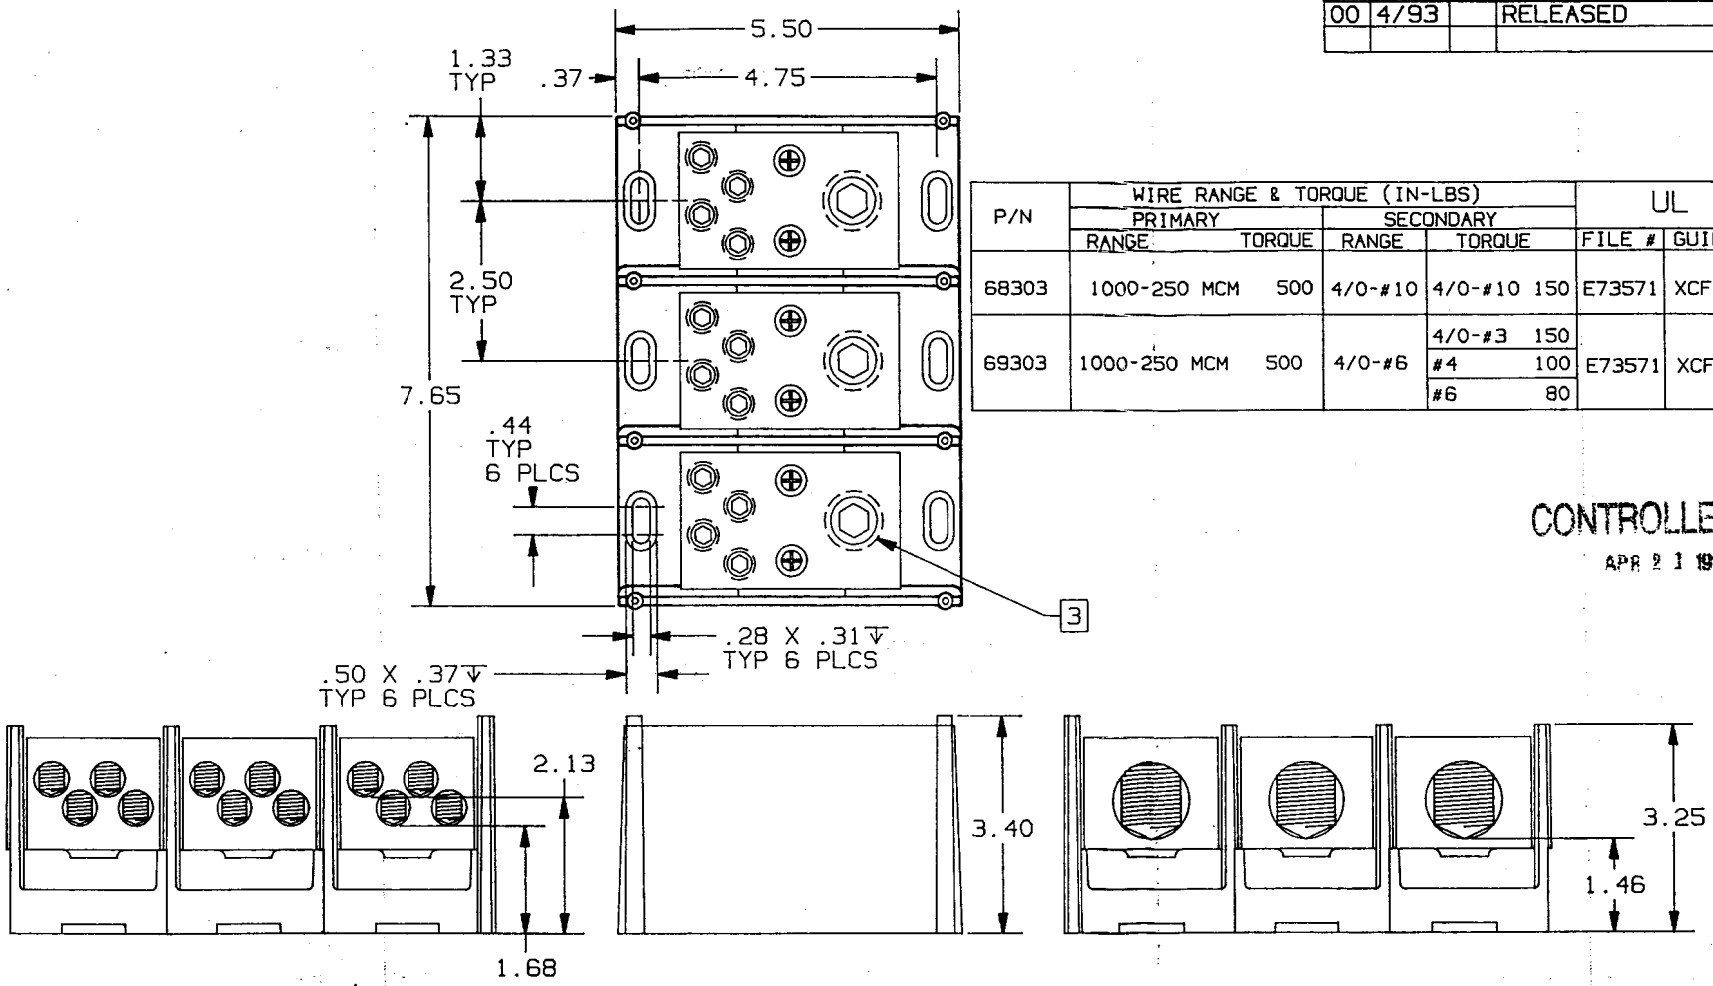

P/N	WIRE RANGE & TORQUE (IN-LBS)				UL		CSA
	PRIMARY		SECONDARY				
	RANGE	TORQUE	RANGE	TORQUE	FILE #	GUIDE #	REPORT #
68303	1000-250 MCM	500	4/0-#10	4/0-#10 150	E73571	XCFR2	LR69363
69303	1000-250 MCM	500	4/0-#6	4/0-#3 150 #4 100 #6 80	E73571	XCFR2	LR15469

CONTROLLED COPY

APR 2 1 1993

3. P/N 68303 USES Ø15/16 HEX SOCKET SET SCREW
   P/N 69303 USES Ø1 1/8 HEX SOCKET SET SCREW.
2. (1) 1000 MCM-250 MCM X (4) 4/0
   3 POLE, 600V.
1. MATERIAL COMPOSITION AND RATING:
   BASE - THERMOPLASTIC 125°C
   CONNECTOR - ALUMINUM OR COPPER ALLOY
   W/TIN PLATE.

NOTES: UNLESS OTHERWISE NOTED

P/N 68303 (CU ONLY)
69303 (CU/AL)

GOULD
CIRCUIT PROTECTION DIV.
GOULD INC.
P.O. BOX 729
MARBLE FALLS, TX 78654

DRAWN BY:	DATE:	UNIT. REL.
KDS	4/93	
CHECKED BY: GHO	DATE: 4/93	SCALE: NONE

DESCRIPTION: PDB

IDENTIFICATION NO. & REVISION: 05B0429 00

TOLERANCE TO BE APPLIED UNLESS OTHERWISE SPECIFIED: .XXXX±.0005; .XXX±.005; .XX±.01; .X±.02; X/X±1/32
UNSPECIFIED ANGLES±1°, SPECIFIED ANGLES±0°30'
DIMENSIONS APPLY AFTER PLATING
ALL SURFACES TO BE 125 UNLESS OTHERWISE SPECIFIED
BREAK ALL SHARP EDGES
THIS DRAWING AND ALL INFORMATION THERE ON IS THE PROPERTY OF GOULD INC. AND IS SUBJECT TO RETURN ON DEMAND. THIS INFORMATION IS CONFIDENTIAL AND MUST NOT BE MADE PUBLIC OR COPIED UNLESS AUTHORIZED.

REFDOC:-