



REV	DESCRIPTION	DA1
00	RELEASED	

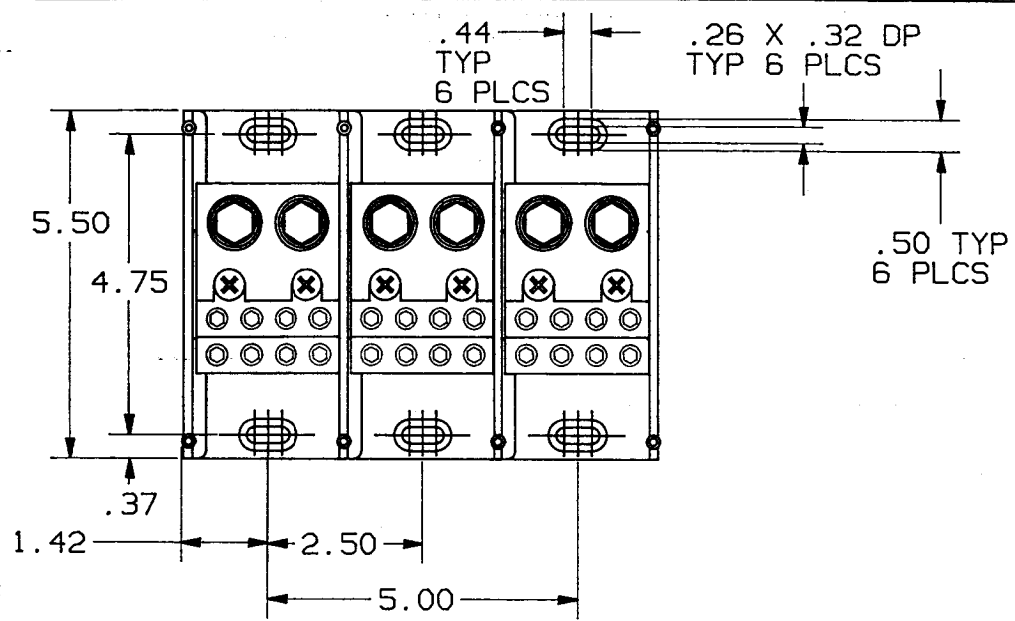

P/N	WIRE RANGE & TORQUE (IN-LBS)				
	PRIMARY		SECONDARY		
	RANGE	TORQUE	RANGE	TORQUE	
68353	500-#4	500-#4	375	2/0-#3	50
				#4-#6	45
				#8	40
				#10-#14	35
69353	500-#4	500-#4	500	2/0-#6	120
				#8-#14	50

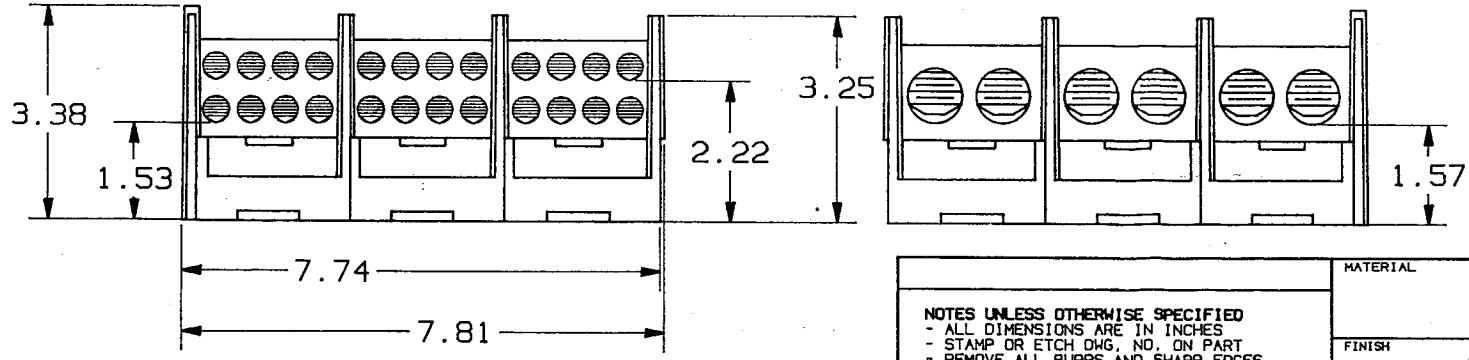

REFERENCE

MAR 16 1992

P/N 68353 (CU ONLY)
P/N 69353 (CU-AL)

1. MATL COMPOSITION AND RATING:
BASE-THERMOPLASTIC-125 °C RTI
CONNECTOR-ALUMINUM OR COPPER
ALLOY-TIN PLATED.

NOTES: UNLESS OTHERWISE SPECIFIED

NOTES UNLESS OTHERWISE SPECIFIED - ALL DIMENSIONS ARE IN INCHES - STAMP OR ETCH DWG. NO. ON PART - REMOVE ALL BURRS AND SHARP EDGES - TOLERANCES: XXXX±.0005; XXX±.005; XX±.01; X±.04; X/X±1/32; ANGLES ±0°30'		MATERIAL		GOULD SHAWMUT GOULD SHAWMUT P.O. BOX 729 MARBLE FALLS, TX 78654
		FINISH		
THIS DRAWING AND ALL INFORMATION THEREON IS THE PROPERTY OF GOULD. IS CONFIDENTIAL. MUST NOT BE COPIED OR MADE PUBLIC UNLESS AUTHORIZED AND IS SUBJECT TO RETURN ON DEMAND.		SIGNATURES		TITLE PDB, (2) 500MCM-#4 X (8) 2/0-#14 3 POLE 600V
		DATE		
ASSEMBLY USED ON	REF OR SIM DWG	CHKD <i>G. Oakley</i>	DATE <i>9/16/91</i>	DWG NO 0580358
		ENGD		REV 00
		APPD <i>BY [Signature]</i>	DATE <i>7/6/91</i>	FILE NO
				SHEET 1 OF 1