


ELECTRICAL CHARACTERISTICS


Melting Time - Current Data - 32-630 Amperes

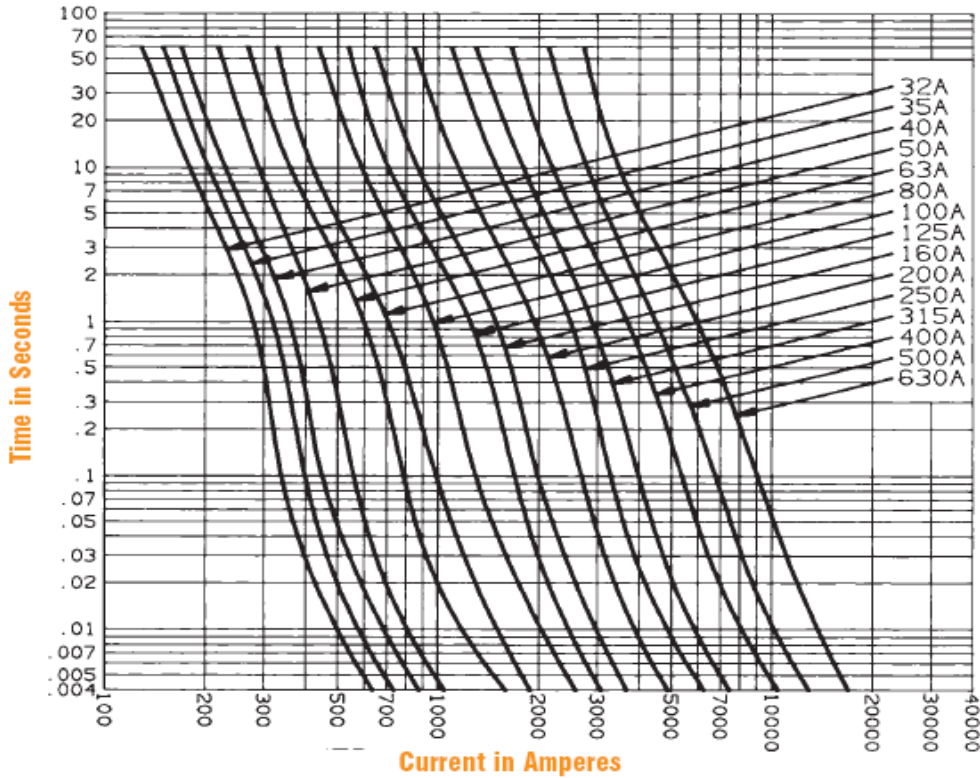

Power Loss (Watts) at Rated Current without striker

RATED CURRENT In (A)	SIZE				
	00	0/0S	1	2	3
16	1.1W				
20	1.4W				
25	1.7W				
32	2.2W	2.2W			
35	2.4W	2.4W			
40	2.8W	2.8W			
50	3.6W	3.6W	3.6W		
63	4.6W	4.6W	4.6W	4.6W	
80	6.0W	6.0W	6.0W	6.0W	
100	7.5W	7.5W	7.5W	7.5W	
125	9.5W	9.5W	9.5W	9.6W	
160	10.7W	12.0	12.7W	12.7W	
200		18.0	16.4W	16.4W	
224			21.5W	18.7W	
250			29.0W	21.5	
315				29.0	25.0W
355				32.0	29.0W
400				34.0	34.0W
425					38.5W
500				45.0W	45.0W
630					60.0W

Peak Let-Thru Current Data - 32-630 Amperes

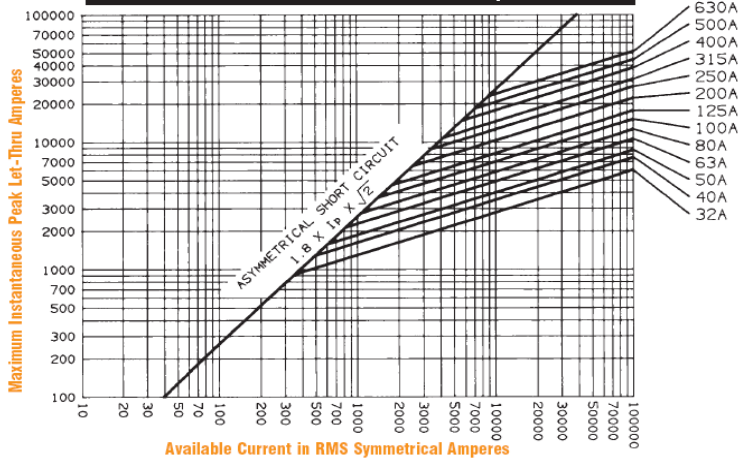

FERRAZ SHAWMUT IS NOW

