



FERRAZ SHAWMUT IS NOW MERSEN

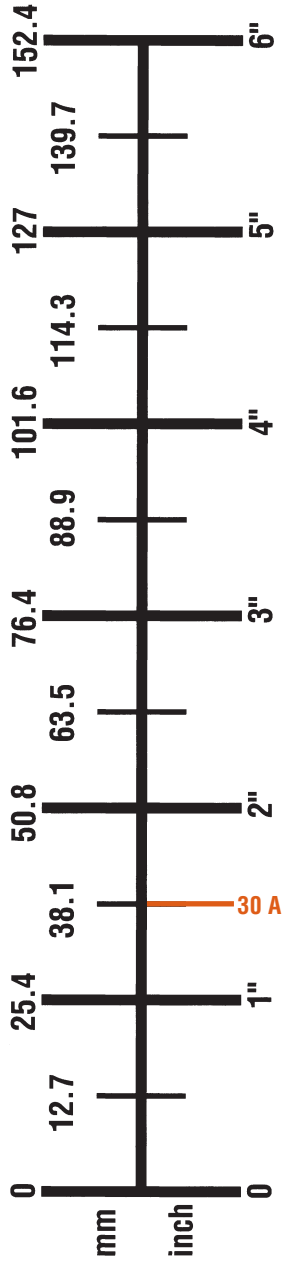

Upgrade to CLASS CC

ATDR (3-30) Amps, 600V CHART

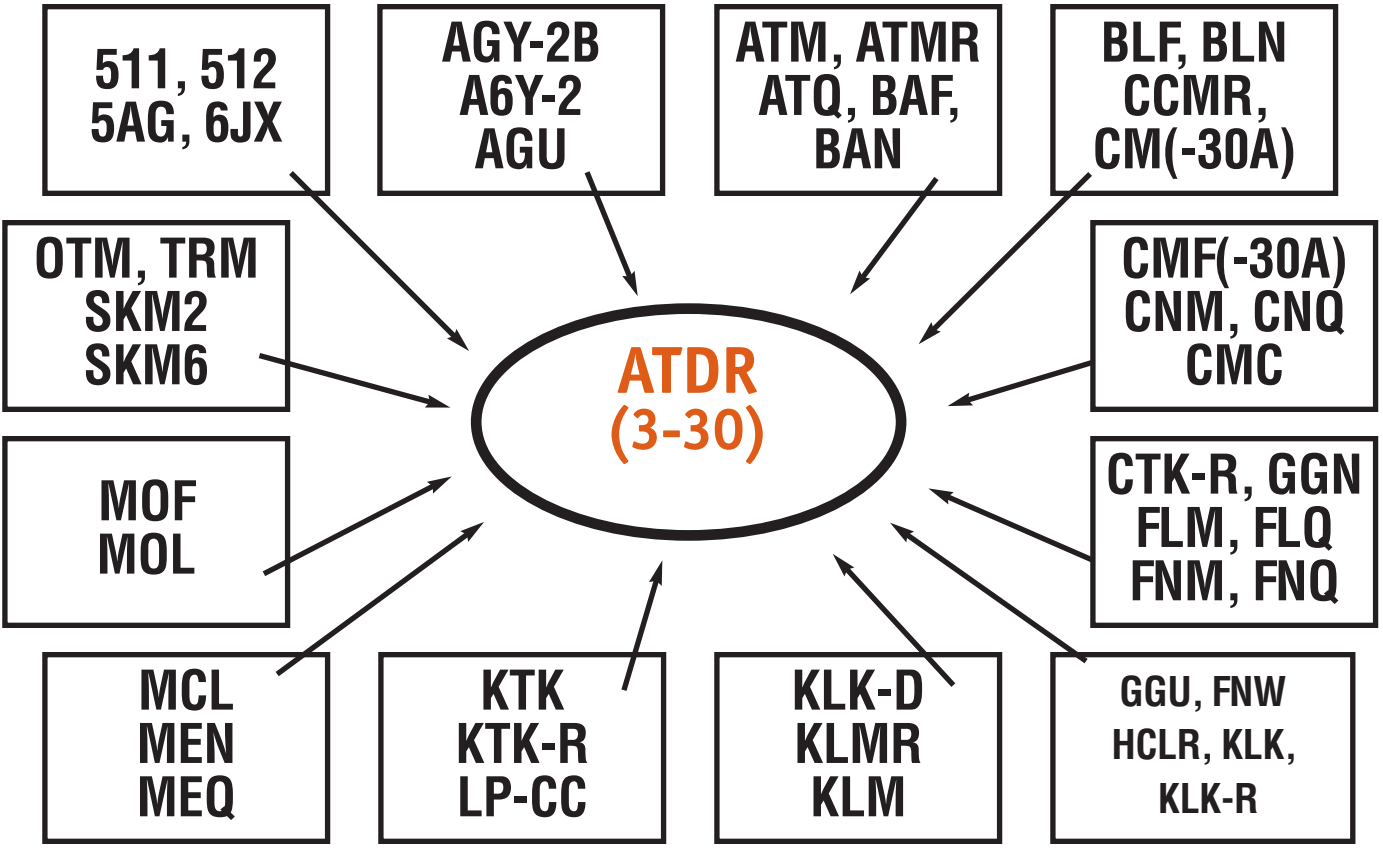

Dimension - 1 1/2 X 13/32 in.
38 x 10mm





FERRAZ SHAWMUT IS NOW MERSEN



Upgrade to CLASS CC

ATQR (1/10 - 2 8/10) Amps, 600V CHART

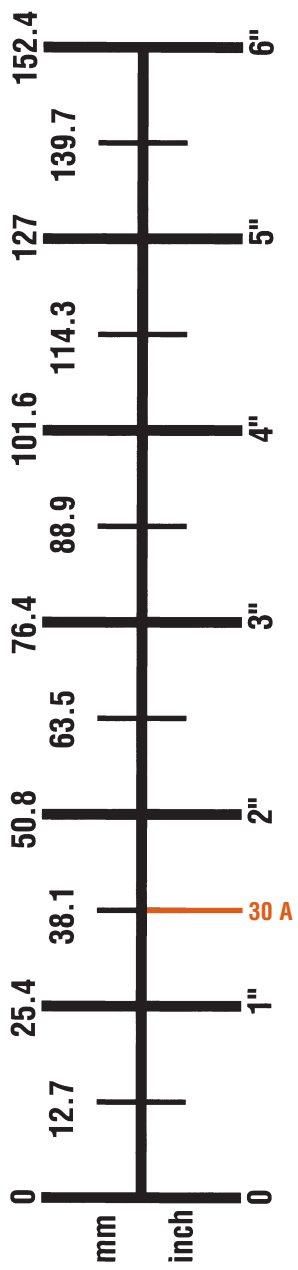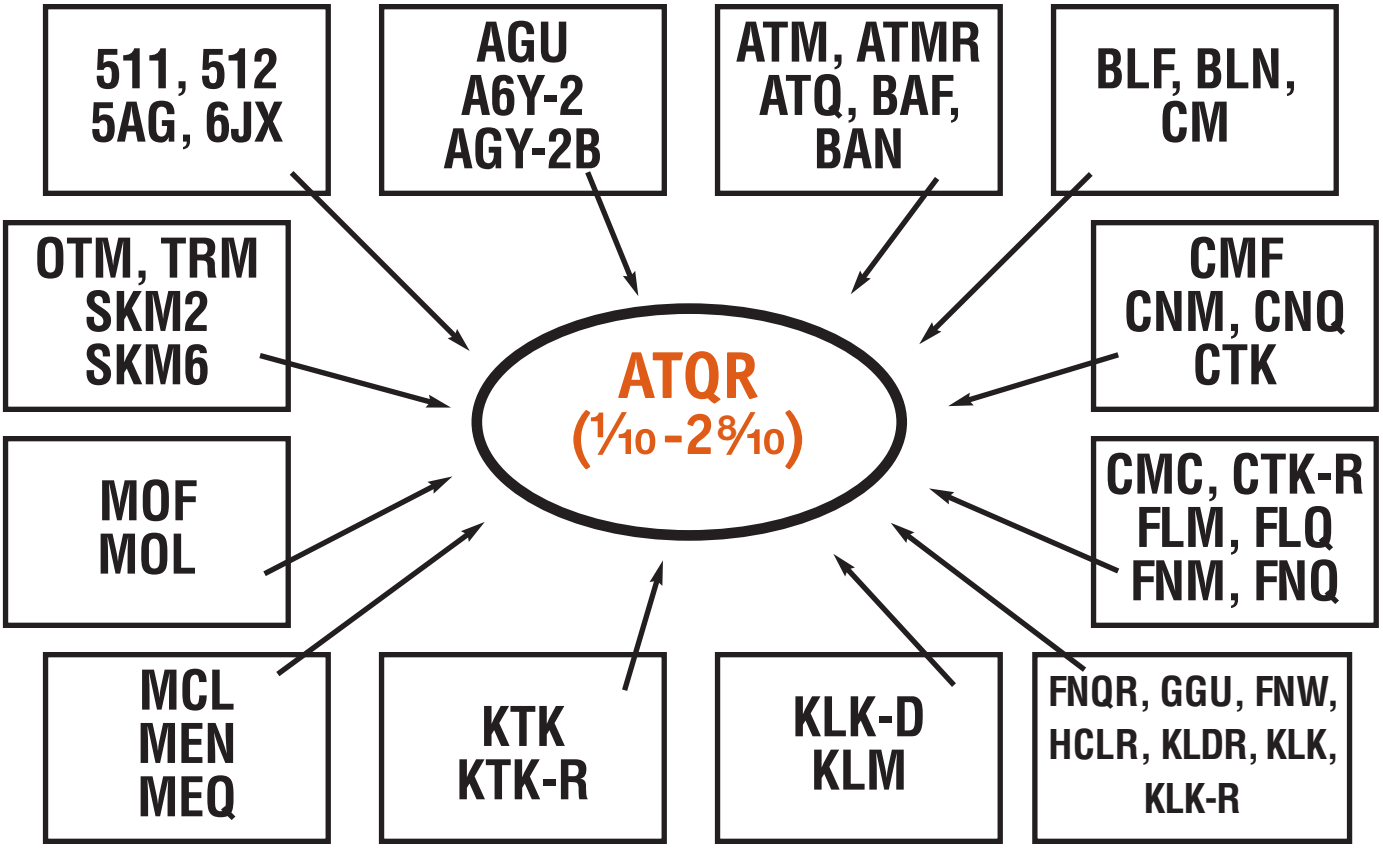


Dimension - 1 1/2 x 13/32 in.
38 x 10mm





Upgrade to A4BQ, 600V, CLASS L CHART

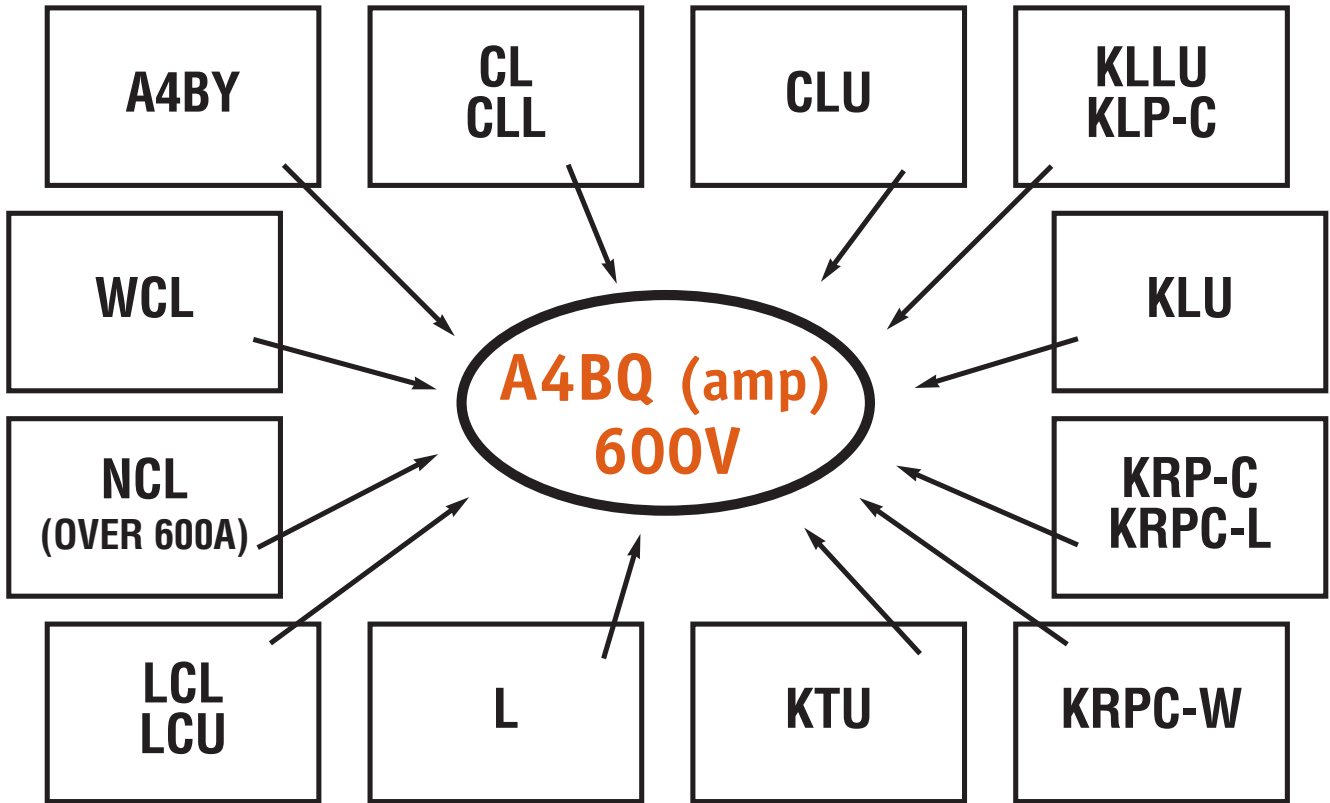




Ampere Rating	Overall Length		Dia.		Blade Thick		Blade Width		Blade Length	
	A		B		C		D		E	
	In.	mm	In.	mm	In.	mm	In.	mm	In.	mm
100 - 800	8 5/8	219	2 1/2	63	3/8	9	2	51	2 13/32	61
801 - 1200	10 3/4	273	2 1/2	63	3/8	9	2	51	3 15/32	88
1201 - 1600	10 3/4	273	3	76	7/16	11	2 3/8	60	3 15/32	88
1601 - 2000	10 3/4	273	3 1/2	89	1/2	12	2 3/4	70	3 15/32	88
2001 - 2500	10 3/4	273	4 1/2	114	3/4	19	3 1/2	89	3 15/32	88
2501 - 3000	10 3/4	273	5	127	3/4	19	4	102	3 15/32	88
3001 - 4000	10 3/4	273	5 3/4	146	3/4	19	4 3/4	121	3 15/32	88
4001 - 5000	10 3/4	273	6 1/4	159	1	25	5 1/4	133	3 15/32	88
5001 - 6000	10 3/4	273	7 1/8	181	1	25	5 3/4	146	3 15/32	88

DIMENSIONS

FERRAZ SHAWMUT IS NOW MERSEN



Upgrade to AJT, 600V, CLASS J CHART

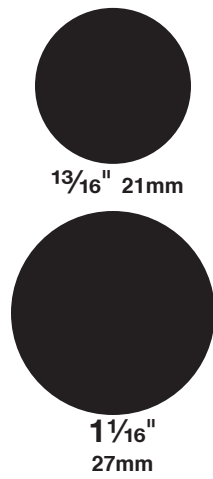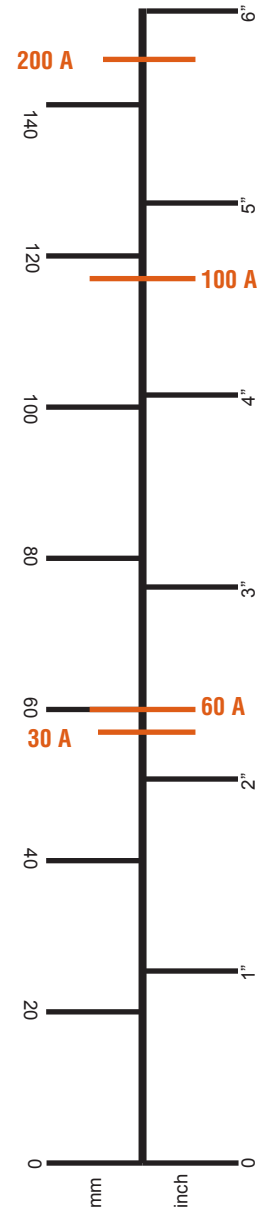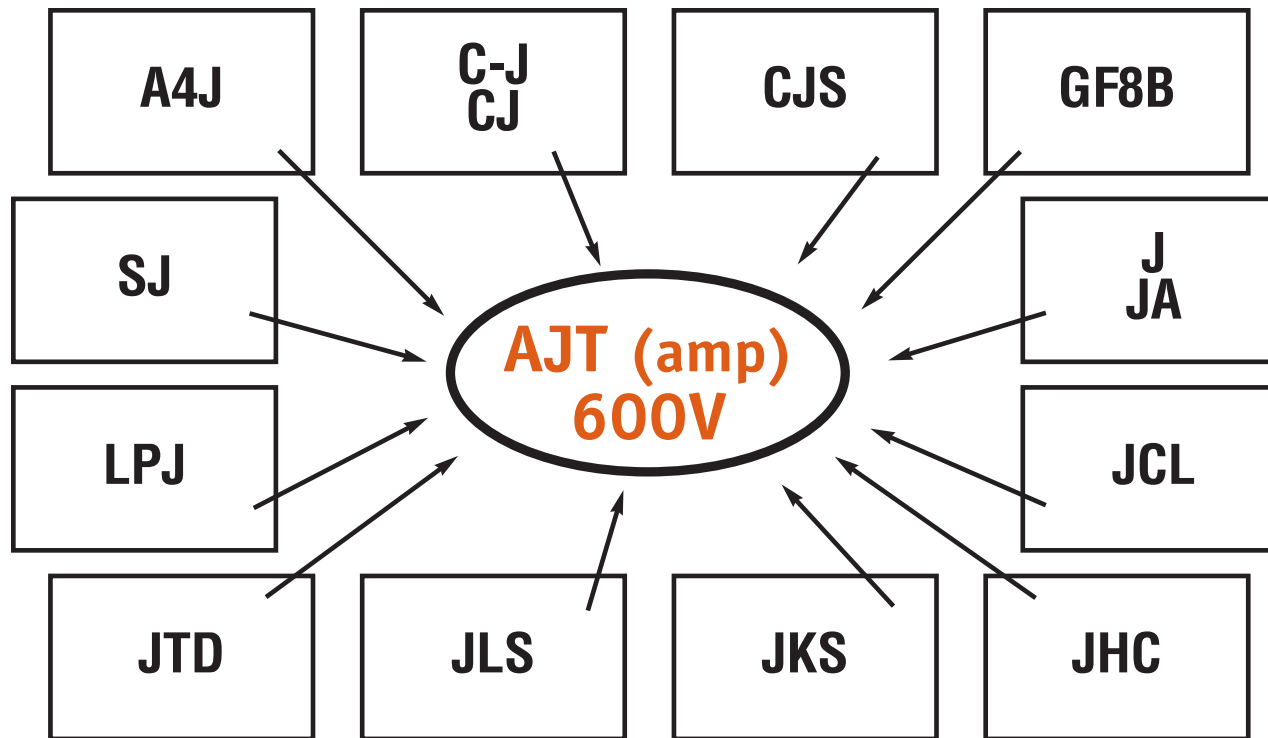



DIMENSIONS

Ampere Rating	Overall Length		Dia.		Blade Thick		Blade Width		Blade Length		Bolt to Bolt		Bolt Dia. Len.		Bolt Dia. Width	
	A	B	C	D	E	F	G	H	In.	mm	In.	mm	In.	mm	In.	mm
1 - 30	2 1/4	57	1 3/16	21	—	—	—	—	—	—	—	—	—	—	—	—
31 - 60	2 3/8	60	1 1/16	27	—	—	—	—	—	—	—	—	—	—	—	—
61 - 100	4 5/8	117	1 1/8	29	1/8	3.2	3/4	19	1	25	3 5/8	92	3/8	10	9/32	7
101 - 200	5 3/4	146	1 5/8	41	3/16	4.8	1 3/8	29	1 3/8	35	4 3/8	111	3/8	10	9/32	7
201 - 400	7 1/8	181	2 1/8	54	1/4	6.3	1 5/8	41	1 7/8	48	5 1/4	133	17/32	14	13/32	10
401 - 600	8	203	2 1/2	64	3/8	9.5	2	51	2 1/8	54	6	152	11/16	18	17/32	13

FERRAZ SHAWMUT IS NOW MERSEN



Upgrade to A6D(amp)R, 600V, RK-1 CHART

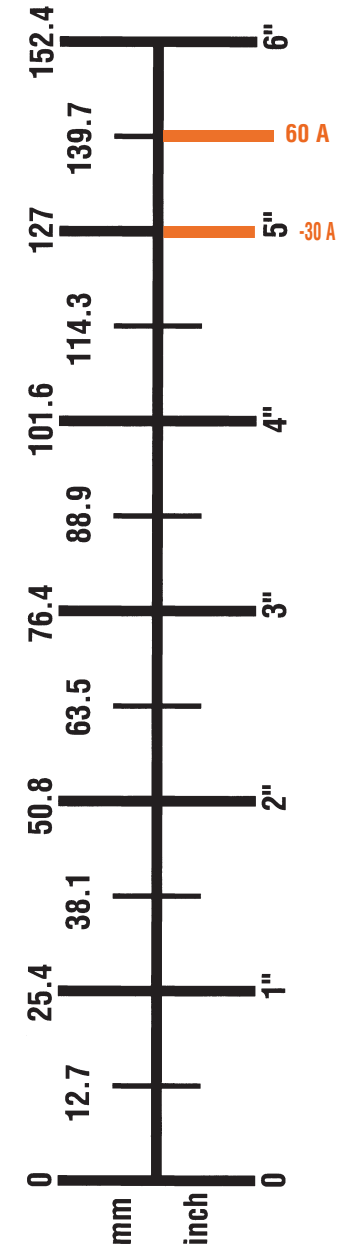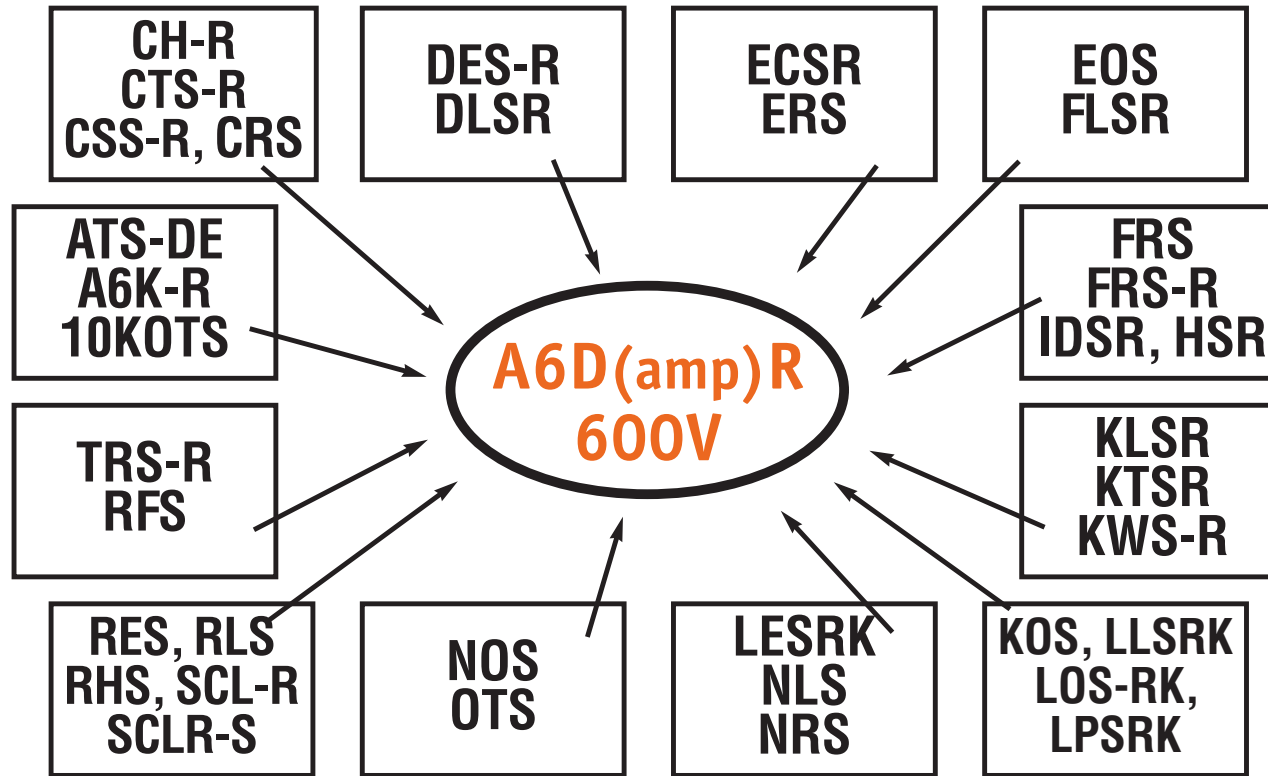


DIMENSIONS

Ampere Rating	Overall Length		Dia.		Blade Thick		Blade Width		Blade Length	
	A	B	C	D	E	F	G	H	I	J
	In.	mm	In.	mm	In.	mm	In.	mm	In.	mm
600V-A6D										
0 - 30	5	127	1 ³ / ₁₆	21	—	—	—	—	—	—
31 - 60	5 1/2	139	1 1/16	27	—	—	—	—	—	—
61 - 100	7 7/8	200	1 5/16	34	1/8	3	3/4	19	1	25
101 - 200	9 1/8	244	1 13/16	46	3/16	5	1 1/8	28	1 3/8	35
201 - 400	11 5/8	295	2 13/16	66	1/4	6	1 5/8	41	1 7/8	48
401 - 600	13 3/8	340	3 1/8	80	1/4	6	2	51	2 1/4	57



13/16" 21mm





1 1/16" 27mm

FERRAZ SHAWMUT IS NOW MERSEN



Upgrade to A2D(amp)R, 250V, RK-1 CHART

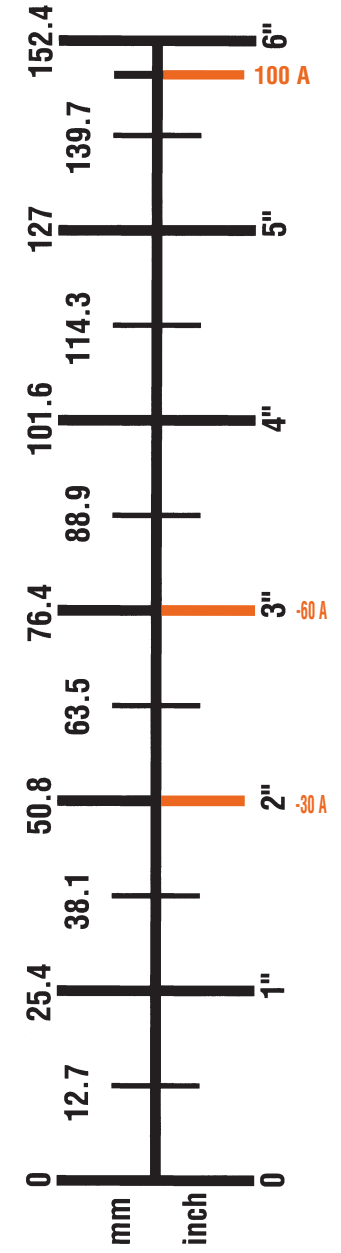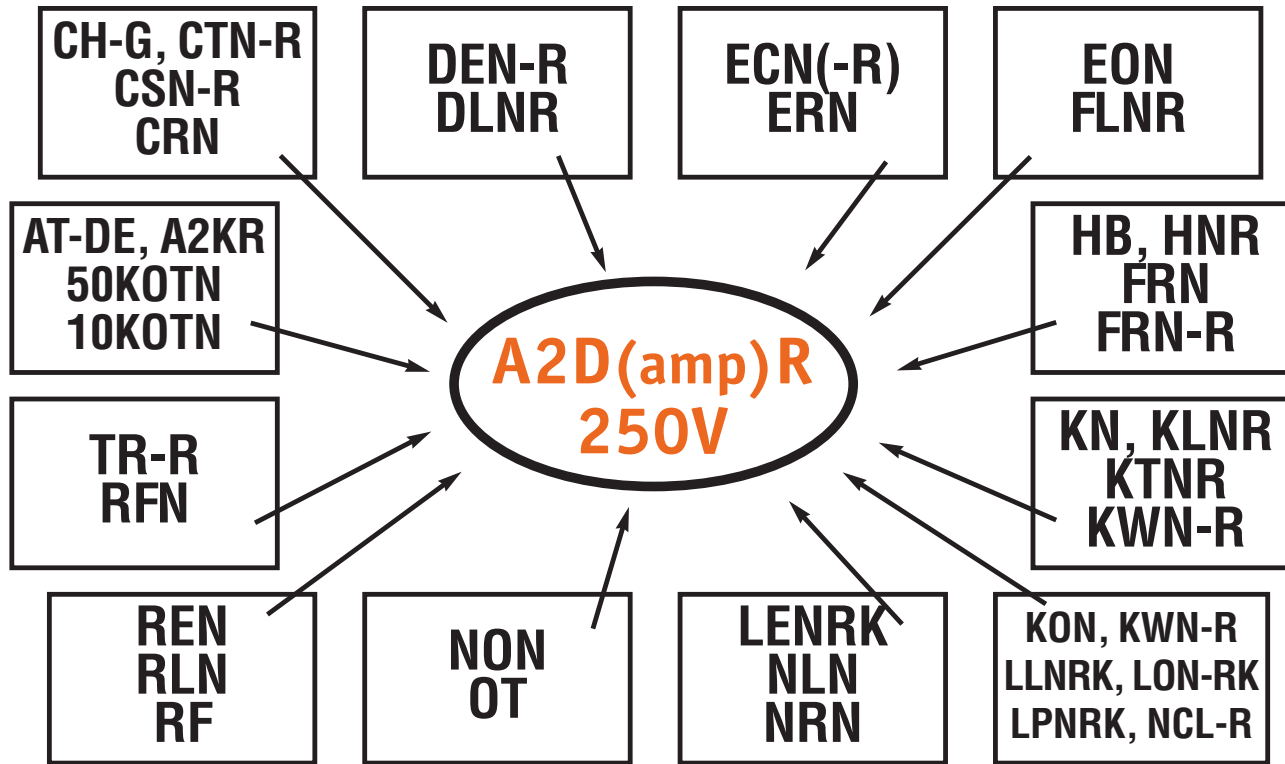

DIMENSIONS

Ampere Rating	Overall Length		Dia.		Blade Thick		Blade Width		Blade Length	
	A	B	C	D	E	In.	mm	In.	mm	
250V-A2D										
0 - 30	2	51	9/16	14	—	—	—	—	—	—
31 - 60	3	76	13/16	21	—	—	—	—	—	—
61 - 100	5 7/8	149	1 1/16	27	1/8	3	3/4	19	1	25
101 - 200	7 1/8	181	1 9/16	40	3/16	5	1 1/8	28	1 3/8	35
201 - 400	8 5/8	219	2 1/16	53	1/4	6	1 5/8	41	1 7/8	48
401 - 600	10 3/8	264	2 9/16	66	1/4	6	2	51	2 1/4	57

